

MILANOSLIM OUTDOOR

TECHNICAL MANUAL

MILANOSLIM OUTDOOR

Design Franco Sargiani



93 H121

MilanoSlim Outdoor.1

p. 631

Technical information

	MILANOSLIM OUTDOOR.1 - art. H121	MILANOSLIM OUTDOOR.2 - art. H101
Minimum hydraulic pressure:	2 dynamic bar	3 dynamic bar
Maximum hydraulic pressure:	5 dynamic bar	5 dynamic bar
Hot water max temperature:	80°C	80°C
Weight:	29,3 Kgs	32,2 Kgs
Recommended installation conditions:		
- Hydraulic pressure:	3 dynamic bar	3 dynamic bar

The MILANOSLIM OUTDOOR shower is available in the MANUAL version including:

A) INTEGRATED HOLDING BASE:

- in stainless steel and with hot and cold water connections
- must be prepared and connected when completing the bathroom sanitary fixtures right before carrying out the facing
- 3/8" inlets.

Versions

MilanoSlim Outdoor . 1 with Teak support h. 126 cm

MilanoSlim Outdoor . 2 with Teak support h. 216 cm

Functioning of MilanoSlim Outdoor :

The bottom handle controls the temperature.

The top handle diverts water to the different outlets and shuts off:

- UPPER SHOWER HEAD
- FRONT JETS
- HANDSHOWER

Base materials:

STAINLESS STEEL AISI 316/316 L

Finishing:

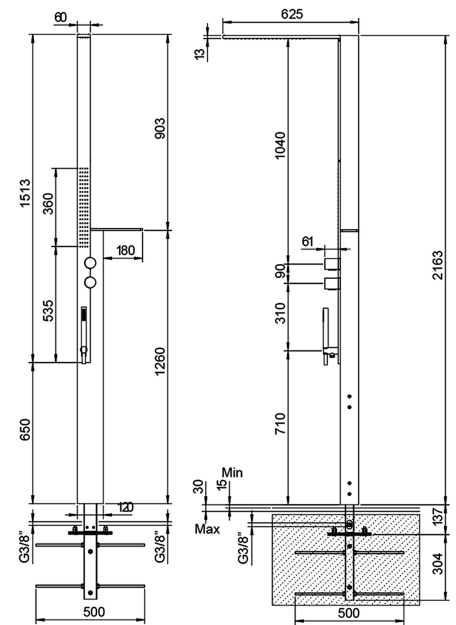
93 Brushed Stainless Steel

Plywood resistant outdoors also in salty environments

Refer to the instructions manual for correct installation guidelines.

H121**Shower column**

- fixed anti-lime shower head
- anti-lime shower sprays for vertical massage
- FIT handshower
- 125 cm PVC flexible
- built-in shower mixer progressive cartridge
- integrated holding base
- 3/8" inlets
- **3-way** shut-off diverter with turning knob
- vanity shelf

**Brushed Stainless Steel****72 93 H121**